

## 10A Surface Mount Super Low Barrier Diode



### Features

- Electrostatic discharge (ESD) test under IEC6100-4-2 standard >16KV.
- Low forward voltage drop.
- Excellent high temperature stability.
- Fast switching capability.
- Suffix "G" indicates Halogen-free part, ex. 10V45 .
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

### Mechanical data

- Case : Molded plastic, TO-277B
- Lead : Solder plated, solderable per MIL-STD-750, Method 2026.
- Polarity: Indicated by cathode band.
- Mounting Position : Any.
- Weight : Approximated 0.093 grams.

### Outline

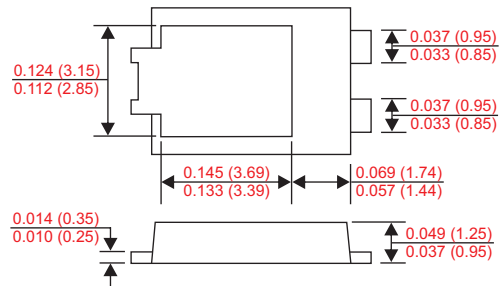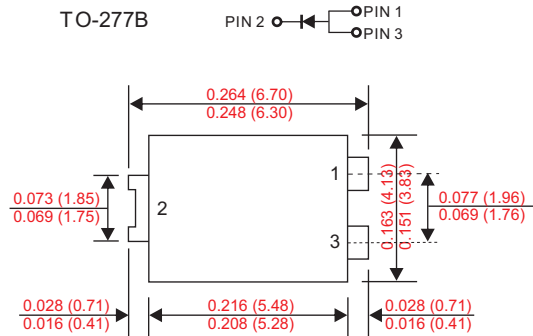

Dimensions in inches and (millimeters)

### Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Parameter	Conditions	Symbol	10V45	UNIT
Marking code			10V45	
Peak repetitive reverse voltage		$V_{RRM}$		V
Working peak reverse voltage		$V_{RWM}$	45	
DC blocking voltage		$V_{RM}$		
RMS reverse voltage		$V_{R(RMS)}$	32	A
Forward rectified current		$I_O$	10	A
Forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	$I_{FSM}$	275	A
Thermal resistance	Junction to ambient(1)	$R_{\theta JA}$	73	°C/W
	Junction to ambient(2)	$R_{\theta JA}$	31	°C/W
Operating and Storage temperature		$T_J, T_{STG}$	-65 ~ +150	°C

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	UNIT
Reverse breakdown voltage	$I_R = 0.5mA$	$V_{(BR)R}$	45			V
Forward voltage drop	$I_F = 8A, T_J = 25^\circ C$	$V_F$		400	420	mV
	$I_F = 10A, T_J = 25^\circ C$			420	470	
	$I_F = 10A, T_J = 125^\circ C$			370	410	
Reverse current	$V_R = V_{RRM} T_J = 25^\circ C$	$I_R$		0.051	0.3	mA
	$V_R = V_{RRM} T_J = 100^\circ C$			5	15	
	$V_R = V_{RRM} T_J = 150^\circ C$			27	75	

Note : 1.FR-4 PCB, 2oz.Copper.  
2.Polyimide PCB, 2oz.Copper.Cathode pad dimensions 18.8mm x 14.4mm.Anode pad dimensions 5.6mm x 14.4mm.

### Rating and characteristic curves

Fig. 1 - Forward Power Dissipation

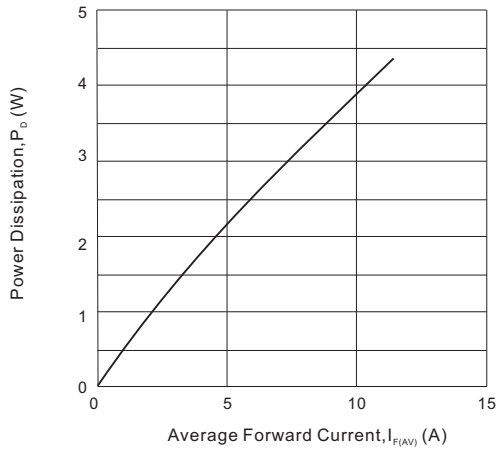


Fig. 2 - Instantaneous Forward Characteristics

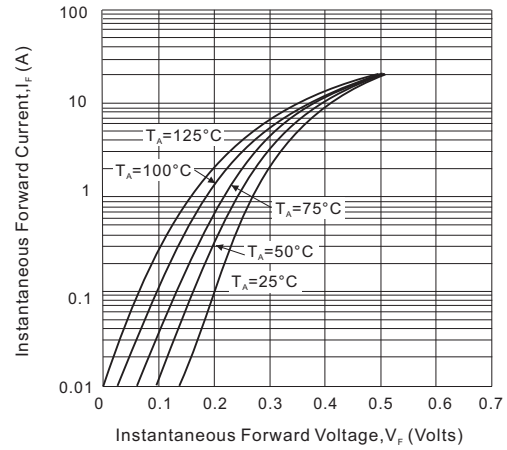


Fig. 3 - Reverse Characteristics

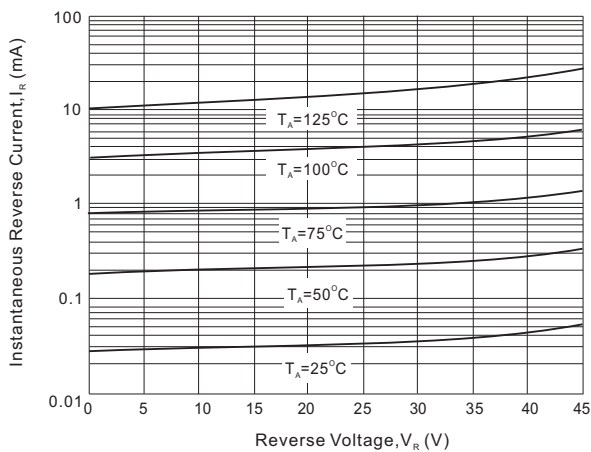


Fig. 4 - Forward Current Derating Curve

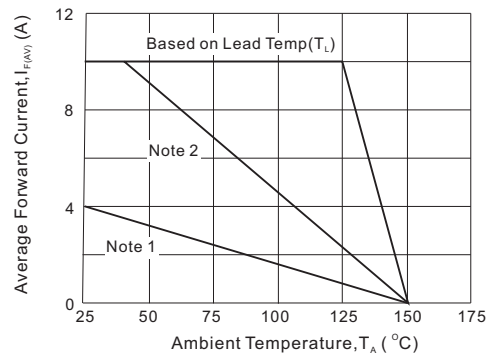


Fig. 5 - Total Capacitance VS. Reverse Voltage



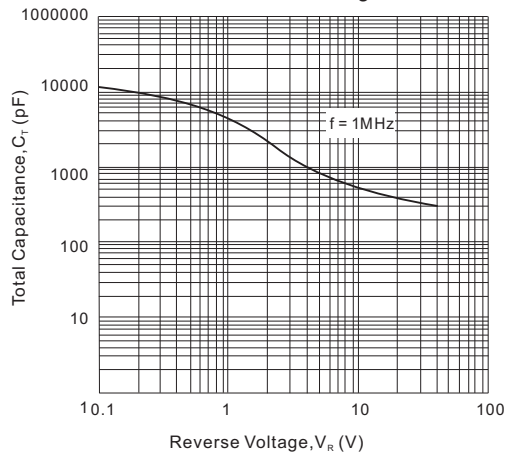


Fig. 6 - Maximum Avalanche Power Curve

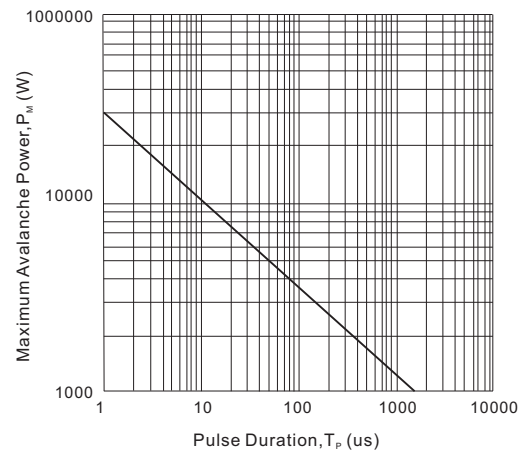

■ TO-277B foot print

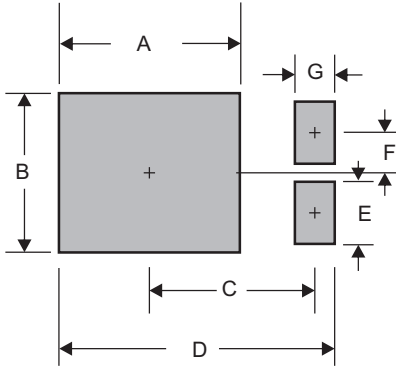

A	B	C	D	E	F	G
0.185 (4.70)	0.142 (3.60)	0.152 (3.87)	0.260 (6.60)	0.055 (1.40)	0.035 (0.90)	0.031 (0.80)

Dimensions in inches and (millimeters)