



MINI-SOP

Features

- Ideal for surface mount application
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Surge overload ratings to 30 amperes
- High temperature soldering guaranteed 265°C/10 seconds at 5 lbs (2.3kg) tension

Mechanical Data

Case: Molded plastic
 Terminals: Plated leads solderable per MIL-STD-202,
 Method 208
 Polarity: Marked on body
 Mounting Position: Any
 Weight: 0.0044 ounce, 0.125 grams (approx)

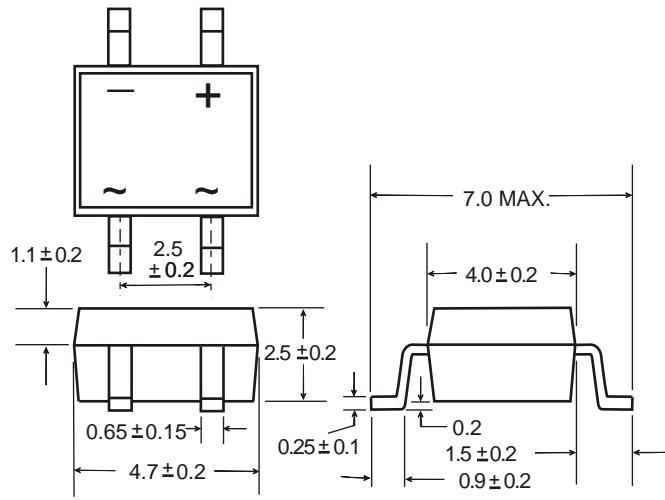

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
 For Capacitive load derate current by 20%.

Parameter	Symbol	MB05S	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C (*3)	IF(AV)				0.5				A
					0.8*				
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM				30				A
Rating for fusing (t<8.3ms)	I ² t				10				A ² sec
Typical thermal resistance per element(1)	ReJA				110				°C /W
Typical junction capacitance per element (2)	C _j				25.0				pF
Operating junction and storage temperature range	T _J , T _{TSG}				-55 to + 150				°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
 For Capacitive load derate by 20 %.

Parameter	Symbol	MB05S	MB1S	MB2S	MB4S	MB6S	MB8S	MB10S	Unit
Maximum instantaneous forward voltage drop per leg at 0.5A	VF				1.1				V
Maximum DC reverse current at rated TA =25 °C DC blocking voltage per element TA =125 °C	IR				10				μA

Notes: (1)Thermal resistance from Junction to Ambient on P.C.board mounting.


(2)Measured at 2.0MHz and applied reverse voltage of 4.0 volts.

(3)R-load on aluminum substrate TA=25°C.


VOLTAGE - 50 TO 1000 VOLTS CURRENT - 0.5 TO 1.0 AMPERES

**Rating and Characteristic Curves (TA=25°C Unless otherwise noted)
B05S thru B10S**

**Fig. 1 Derating Curve for
Output Rectified Current**

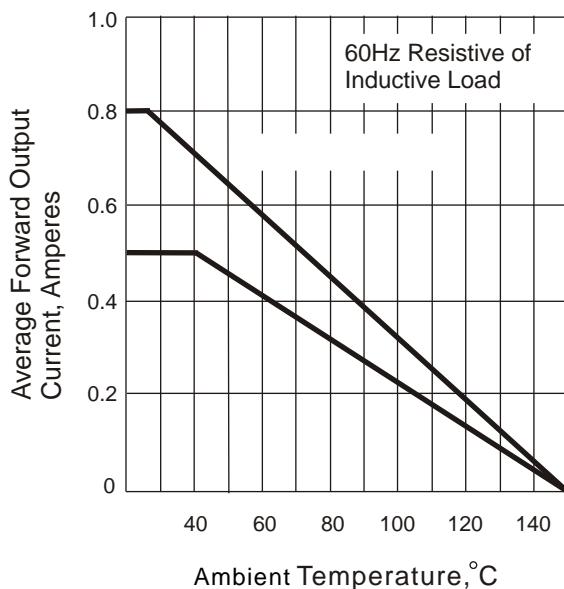

**Fig. 2 Maximum Non-repetitive Peak
Forward Surge Current**

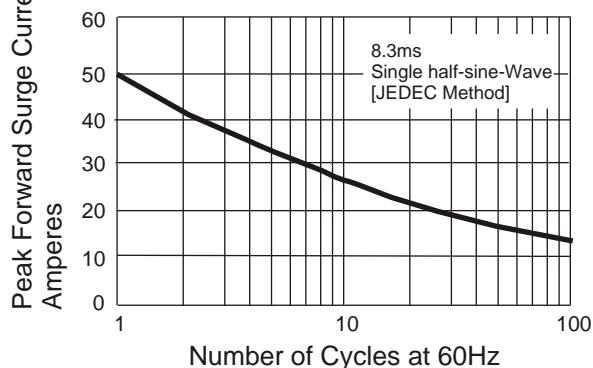

**Fig. 3 Typical Instantaneous
Forward Characteristics**


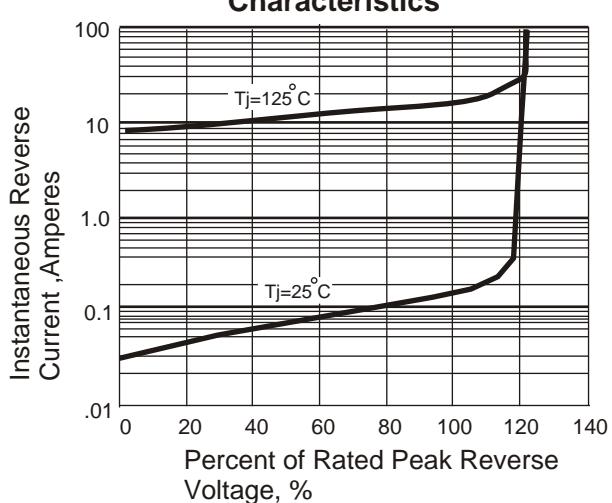


Fig. 5 Typical Junction Capacitance

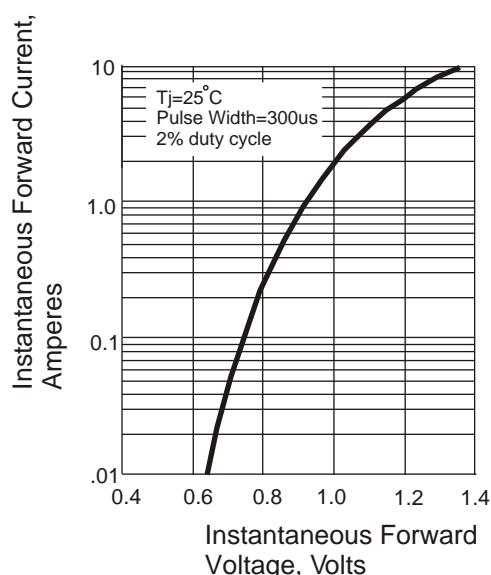