

6.0 A Single-Phase Silicon Bridge Rectifier

Rectifier Reverse Voltage 50 to 1000V

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High case dielectric strength of 1500VRMS Ideal for printed circuit boards
- High surge current capability

Mechanical Data


Case : Molded plastic body over passivated junctions
Terminals : Plated leads solderable per MIL-STD-750,
Method 2026

Polarity : Polarity symbols molded on body

Mounting Position : Any(3)

Mounting Torque : 5 in-lbs max.

Weight : 0.15 ounce, 4.0 grams (approx)

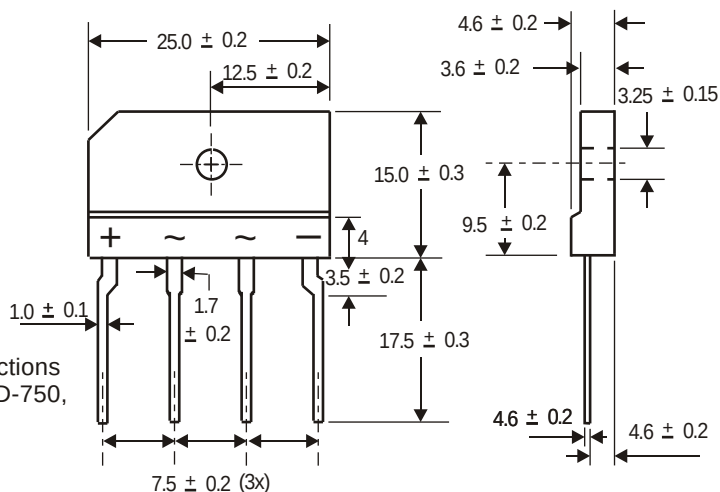

Dimensions in millimeters(1mm =0.0394")

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

[illegible]

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

Parameter	Symbol	KBJ 6005	KBJ 601	KBJ 602	KBJ 604	KBJ 606	KBJ 608	KBJ 610	Unit
Maximum instantaneous forward voltage drop per leg at 4.0A	V _F	1.1							V
Maximum DC reverse current at rated DC blocking voltage per leg T _A =25°C T _A =125°C	I _R	10 250							μA

Notes: (1)Unit case mounted on Al plate heatsink.

(2) Units mounted on P.C.B. with 0.5x0.5" (12x12mm) copper pads and 0.375" (9.5) lead length.

(3) Recommended mounting option is to bolt down on heat sink with silicone thermal compound for maximum heat transfer with #6 screw.

Rating and Characteristic Curves ($T_A = 25^{\circ}\text{C}$ Unless otherwise noted) KBJ6005 thru KBJ610

Fig. 1 Derating Curve for Output Rectified Current

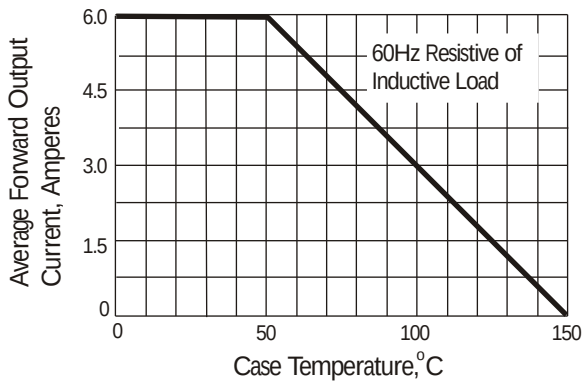


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

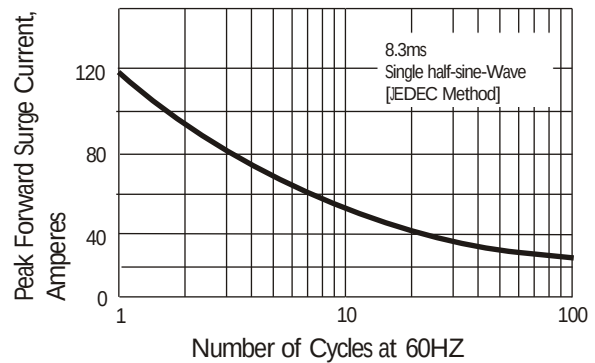


Fig. 3 Typical Instantaneous Forward Characteristics

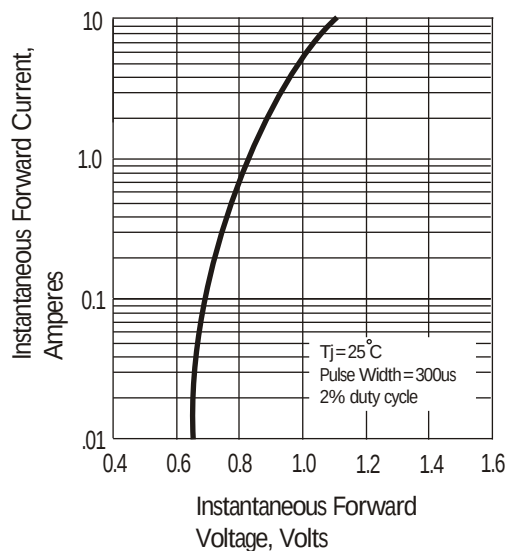


Fig. 4 Typical Reverse Characteristics at $T_J = 25^{\circ}\text{C}$

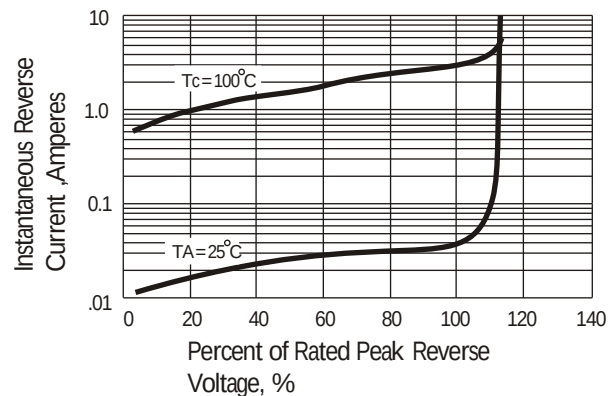


Fig. 5 Typical Junction Capacitance

