

CURRENT 5.0 Ampere
VOLTAGE RANG 50 to 1000 Volts

HER501 THRU HER508


FEATURES

- Low cost
- Diffused junction
- Ultra fast switching for high efficiency
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0

MECHANICAL DATA

- Case: JEDEC DO-27 molded plastic
- Polarity: Color band denotes cathode
- Weight: 0.04 ounces , 1.1 grams
- Mounting position: Any

DO-27 / DO-201AD

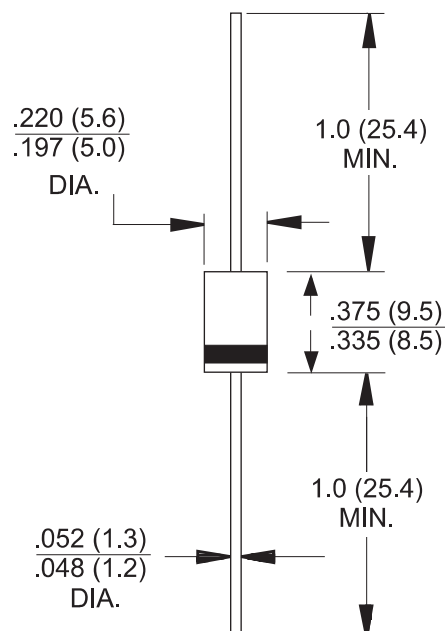

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave ,60Hz, resistive or inductive load.
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	HER501	HER502	HER503	HER504	HER505	HER506	HER507	HER508	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _A =55 °C	I _(AV)	5.0								A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I _{FSM}	200								A
Peak Forward Voltage at 5.0A DC	V _F	1.0				1.3	1.7			V
Maximum DC Reverse Current @T _J =25°C at Rated DC Blocking Voltage @T _J =100°C	I _R	5.0 100								uA
Maximum Reverse Recovery Time (Note1)	T _{RR}	50					75			nS
Typical Junction Capacitance (Note2)	C _J	75					50			pF
Typical Thermal Resistance (Note3)	R _{JA}	20								°C/W
Operating Temperature Range	T _J	-50 to +125								°C
Storage Temperature Range	T _{STG}	-50 to +150								°C

NOTES: 1.Measured with I_F=0.5A, I_R=1A , I_{RR}=0.25A

2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC

3.Thermal resistance junction to ambient

CURRENT 5.0 Ampere
VOLTAGE RANG 50 to 1000 Volts

HER501 THRU HER508

RATING AND CHARACTERISTIC CURVES HER501 Thru HER508

FIG. 1 –TYPICAL FORWARD CURRENT DERATING CURVE

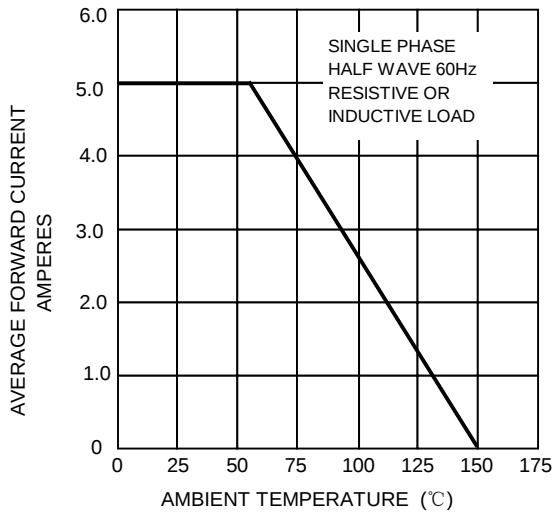


FIG. 4 – MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

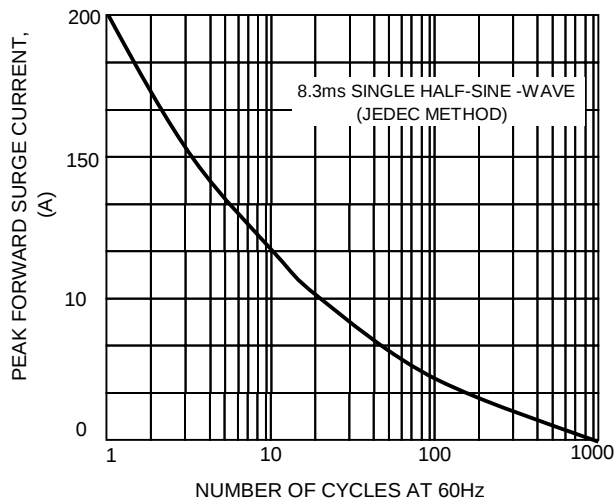


FIG.5 – TYPICAL JUNCTION CAPACITANCE

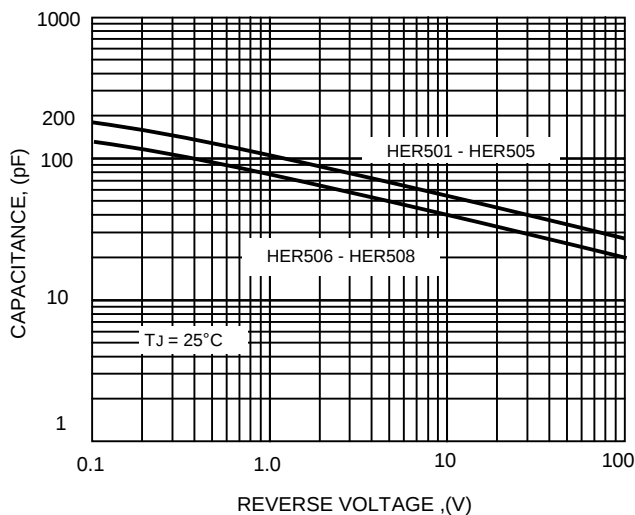


FIG.2 –TYPICAL REVERSE CHARACTERISTICS

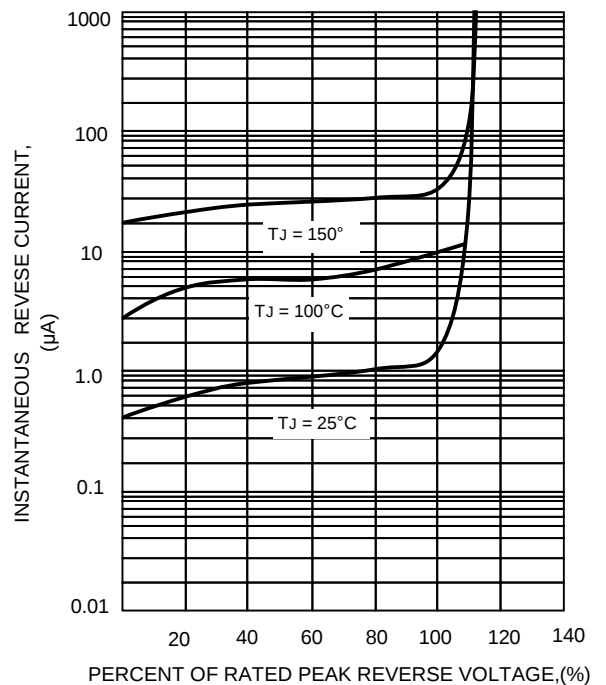


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

