

CURRENT 2.0 Ampere
VOLTAGE RANG 20 to 200 Volts

SR220 THRU SR2200


FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension

MECHANICAL DATA

- ◆ **Case:** JEDEC DO-15 molded plastic body
- ◆ **Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026
- ◆ **Polarity:** Color band denotes cathode end
- ◆ **Mounting Position:** Any
- ◆ **Weight:** 0.012 ounce, 0.39 grams

DO-15\DO-204AC

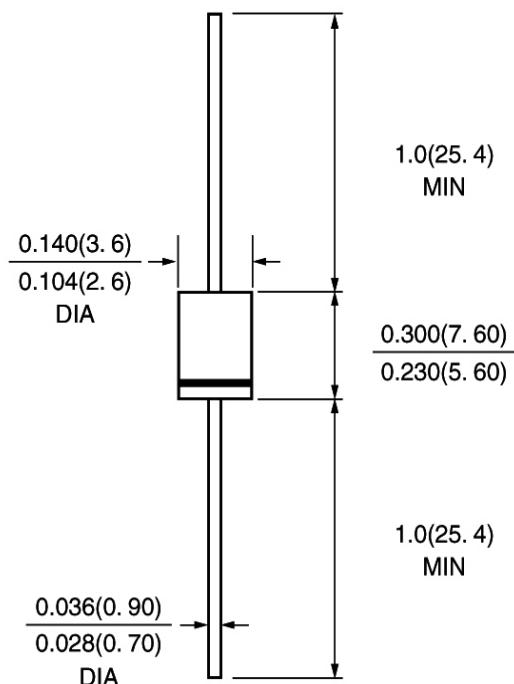

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Catalog Number	SYMBOLS	SR 220	SR 230	SR 240	SR 250	SR 260	SR 270	SR 280	SR 290	SR 2100	SR 2150	SR 2200	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	70	80	90	100	150	200	VOLTS
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	49	56	63	70	105	140	VOLTS
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	70	80	90	100	100	200	VOLTS
Maximum average forward rectified current 0.375”(9.5mm) lead length(see fig.1)	I _(AV)	2.0											Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	60.0											Amps
Maximum instantaneous forward voltage at 2.0A	V _F	0.55		0.70		0.85				0.95		Volts	
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =100°C	I _R	0.5								0.2		mA	
		10.0				5.0				2.0			
Typical junction capacitance (NOTE 1)	C _J	220		80									pF
Typical thermal resistance (NOTE 2)	R _{θJA}	50.0											°C/W
Operating junction temperature range	T _J	-65 to +125					-65 to +150					°C	
Storage temperature range	T _{STG}	-65 to +150											°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

CURRENT 2.0 Ampere
VOLTAGE RANG 20 to 200 Volts

SR220 THRU SR2200

RATING AND CHARACTERISTIC CURVES SR220 Thru SR2200

