

# axial super-fast recovery diode

CURRENT 3.0 Ampere  
VOLTAGE RANG 50 to 1000 Volts

## HER301 THRU HER308

DO-15\DO-204AC

### FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:  
260 /10 seconds/.375 (9.5mm)lead length at 5 lbs(2.3kg)  
tension

### MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E  
method 208C
- Mounting position: Any
- Weight: 0.042ounce, 1.19 grams

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	HER 301	HER 302	HER 303	HER 304	HER 305	HER 306	HER 307	HER 308	UNITS
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	Volts
Maximum Average Forward Rectified Current 0.375 (9.5mm) lead length at $T_A=50$	$I_{(AV)}$	3.0								Amp
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	125								Amps
Maximum Instantaneous Forward Voltage @ 3.0A	$V_F$	1.0		1.3		1.5		1.7		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	$T_A = 25$ 10								" A
		$T_A = 125$ 500								
Maximum Full Load Recovery Current,full cycle average 0.375 (9.5mm)lead length at $T_L=55$	$I_{R(AV)}$	150								" A
Maximum Reverse Recovery Time(NOTE 1)	$t_{rr}$	50				75				ns
Typical Thermal Resistance (NOTE 2)	$C_J$	70				50				PF
Typical Thermal Resistance(NOTE 3)	$R_{\theta JA}$	20								/W
Operating Junction Temperature Range	$T_J, T_{STG}$	(-55 to +150)								

#### Notes:

- 1 Test Condition:  $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A$
2. Measured at 1.0 MHz and applied reverse of 4.0 V
- 3 Thermal resistance from junction to ambient with .375 (9.5mm)lead length, P.C.B. mounted. .

CURRENT 3.0 Ampere  
 VOLTAGE RANG 50 to 1000 Volts

## HER301 THRU HER308

### RATING AND CHARACTERISTIC CURVES HER301 Thru HER308

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

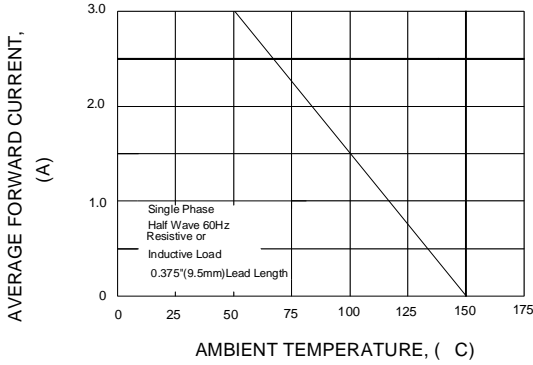


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

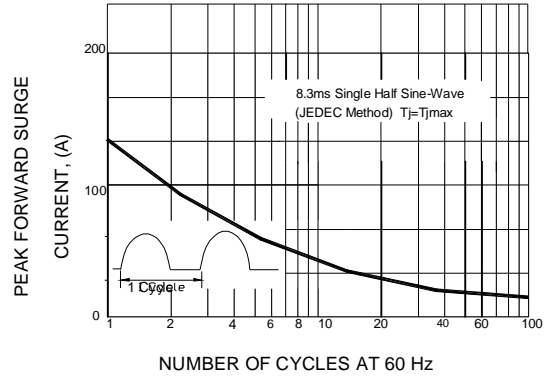


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

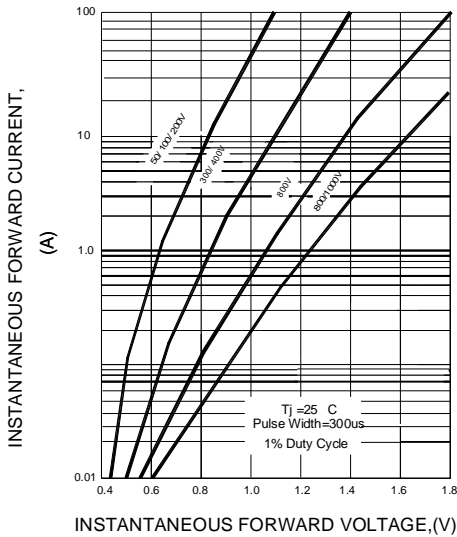


FIG.5-TYPICAL JUNCTION CAPACITANCE

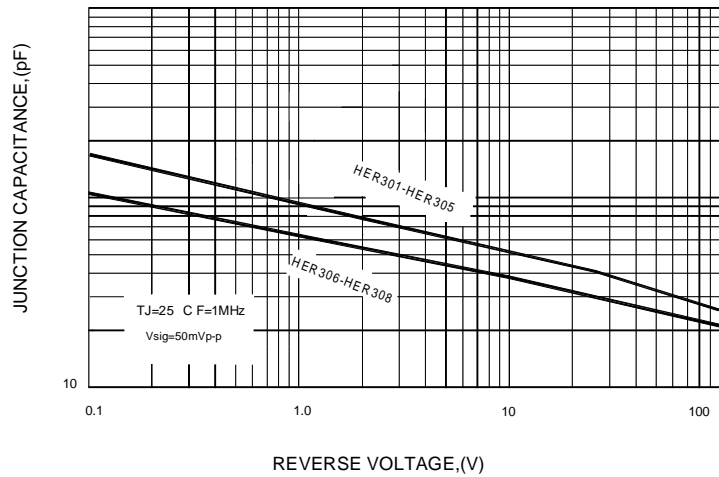


FIG.4-TYPICAL REVERSE CHARACTERISTICS

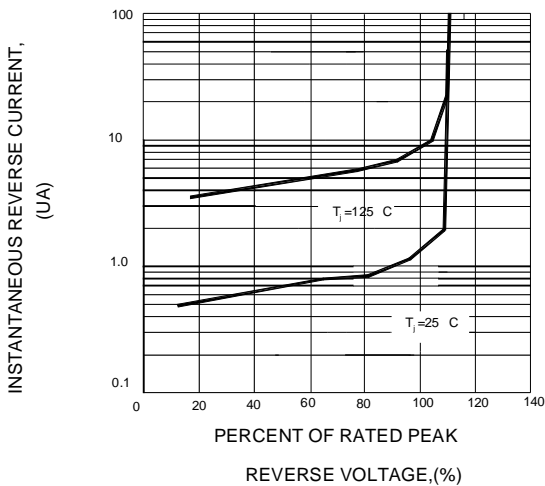


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

