

CURRENT 1.0 Ampere
VOLTAGE RANG 50 to 600 Volts


SF11 THRU SF18

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260 /10 secods/.375 (9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012ounce, 0.33grams

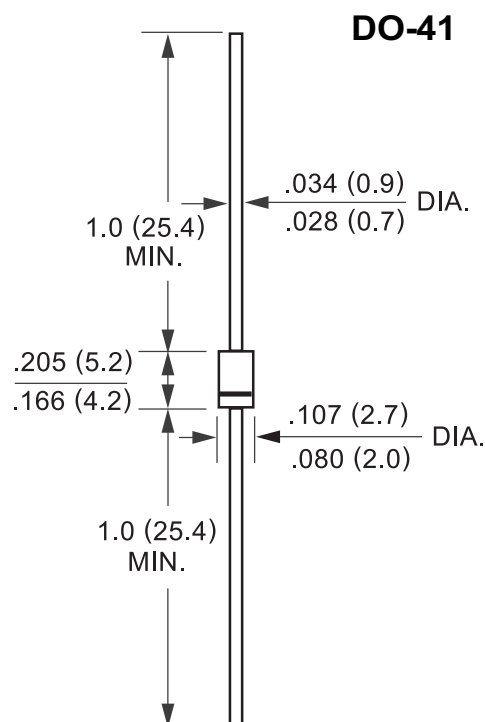

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	SF 11	SF 12	SF 13	SF 14	SF 15	SF 16	SF 17	SF 18	UNITS
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	50	100	150	200	300	400	500	600	Volts
Maximum RMS Voltage		V _{RMS}	35	70	105	140	210	280	350	420	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	150	200	300	400	500	600	Volts
Maximum Average Forward Rectified Current 0.375 (9.5mm) lead length at T _A = 55		I _(AV)	1.0								Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	30								Amps
Maximum Instantaneous Forward Voltage @ 1.0A		V _F	0.95				1.25		1.7		Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25	I _R	5.0								μA
	T _A = 125		50								
Maximum Reverse Recovery Time Test conditions IF=0.5A,IR=1.0A,IRR=0.25A		t _{rr}	35								ns
Typical Thermal Capavitance (Measured at 1.0MHz and applied rever voltage of 4.0V)		C _J	15				10				PF
Typical Thermal Resistance(NOTE 1)		R _{0JA}	60								/W
Operating Junction Temperature Range		T _J	(-55 to +150)								
Storage Temperature Range		T _{STG}	(-55 to +150)								

Notes:

1. Thermal resistance from junction to ambient with .375 (9.5mm)lead length, P.C.B. mounted. .

CURRENT 1.0 Ampere
VOLTAGE RANG 50 to 600 Volts

SF11 THRU SF18

RATING AND CHARACTERISTIC CURVES SF11 Thru SF18

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

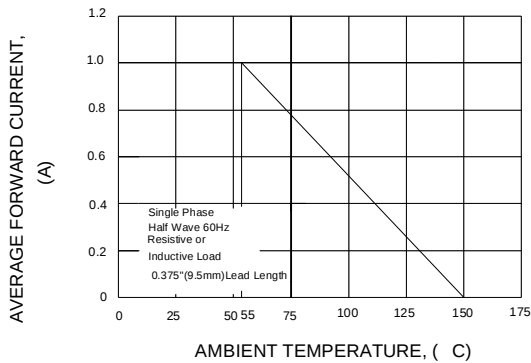


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

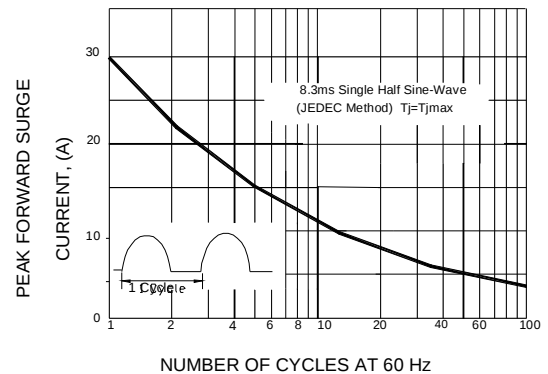


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

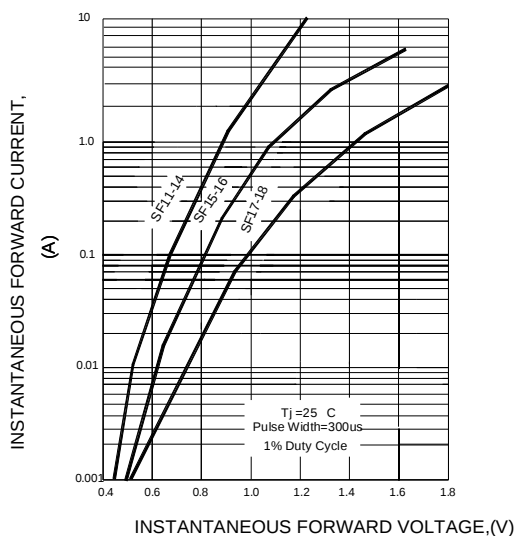


FIG.5-TYPICAL JUNCTION CAPACITANCE

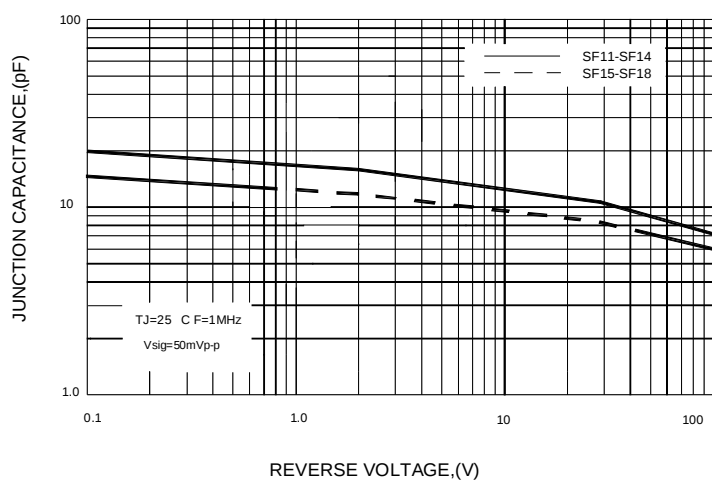


FIG.4-TYPICAL REVERSE CHARACTERISTICS


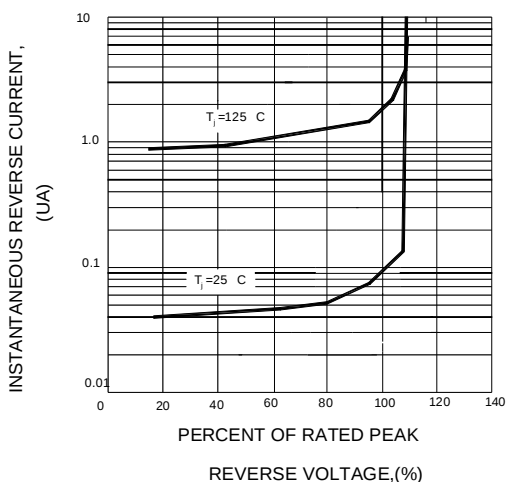


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC



NOTE: 1.Rise Time =7ns max.Input Impedance=1megohm.22pF
2.Rise time=10ns max.Source Impedance=50 ohms

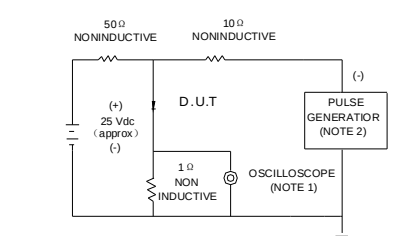